

(12)特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局



(43) 国際公開日
2005年2月3日 (03.02.2005)

PCT


(10) 国際公開番号
WO 2005/010540 A1

- (51) 国際特許分類: G01R 31/36 EV ENERGY CO., LTD.) [JP/JP]: 〒4310452 静岡県湖西市境宿555番地 Shizuoka (JP).
- (21) 国際出願番号: PCT/JP2004/010983
- (22) 国際出願日: 2004年7月26日 (26.07.2004)
- (25) 国際出願の言語: 日本語
- (26) 国際公開の言語: 日本語
- (30) 優先権データ:
特願2003-282037 2003年7月29日 (29.07.2003) JP
特願2004-202931 2004年7月9日 (09.07.2004) JP
- (71) 出願人 (米国を除く全ての指定国について): パナソニック・イービー・エナジー株式会社 (PANASONIC
- (72) 発明者: および
- (75) 発明者/出願人 (米国についてのみ): 村上 雄才 (MURAKAMI, Yusai), 山邊 律人 (YAMABE, Norito).
- (74) 代理人: 特許業務法人池内・佐藤アンドパートナーズ (IKEUCHI SATO & PARTNER PATENT ATTORNEYS); 〒5306026 大阪府大阪市北区天満橋1丁目8番30号OAPタワー26階 Osaka (JP).
- (81) 指定国 (表示のない限り、全ての種類の国内保護が可能): AF, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GI, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT,

[続表有]

(54) Title: METHOD AND DEVICE FOR ESTIMATING CHARGE/DISCHARGE ELECTRICITY AMOUNT OF SECONDARY CELL

(54) 発明の名称: 二次電池の充放電電量推定方法及び装置

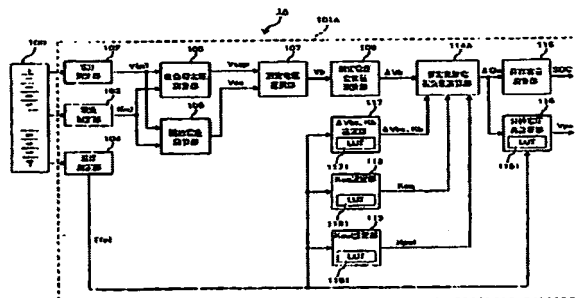

102 VOLTAGE MEASUREMENT SECTION
103 CURRENT MEASUREMENT SECTION
104 TEMPERATURE MEASUREMENT SECTION
105 NO-LOAD VOLTAGE CALCULATION SECTION
106 RELEASE VOLTAGE CALCULATION SECTION
107 MEASUREMENT VOLTAGE SELECTION SECTION
108 MEASUREMENT VOLTAGE CHANGE AMOUNT CALCULATION SECTION
109 AVERAGE SETTING SECTION
110 Kpq SETTING SECTION
111 Kpq SETTING SECTION
112 Kpq SETTING SECTION
113 Kpq SETTING SECTION
114 ESTIMATED CHARGE/DISCHARGE ELECTRICITY AMOUNT CALCULATION SECTION
115 REMAINING CAPACITY CALCULATION SECTION
116 POLARIZATION VOLTAGE RE CALCULATION SECTION

(57) Abstract: When a particular selection condition is satisfied, a no-load voltage calculation section (105) calculates a no-load voltage V_{scp} which is a voltage piece when the current in the approximate straight line obtained by statistical processing is zero for a plurality of set data consisting of current data $I(n)$ and voltage data $V(n)$. Moreover, when a particular current condition is satisfied continuously for a certain time, a release voltage calculation section (106) calculates the terminal voltage of the secondary cell as a release voltage V_{oc} . By using a preset voltage change amount adjustment constant ΔV_{bc} , an adjustment coefficient K_b , an electromotive force change constant K_{eq} , and a polarization voltage generation constant K_{pol} , an estimated charge/discharge electricity amount calculation section (114) calculates an estimated charge/discharge electricity amount ΔQ_c as a function of a no-load voltage in a predetermined period or a release voltage change amount ΔV_b .

[続表有]

WO 2005/010540 A1